




Standard Band saw Bench



The Williams and White Standard Bandsaw Bench is designed to be a universal bandsaw maintenance station. This bench provides all the necessary features to maintain your bandsaws in a heavy duty package.

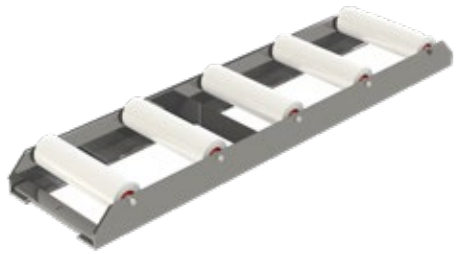

Highlights


- ✓ **Square beam design** → for durability and stability
- ✓ **Will fit all stretcher brands** → versatility for all environments
- ✓ **Mild steel or NiChrome precision ground anvils available** → for hammering (both sides)
- ✓ **Manual extendable saw length adjustment** → to fit multiple lengths of saws
- ✓ **Manual saw lift** → for saw inspection



Key Features


Williams and White Dish-O-Matic II System

- + Patented Williams & White Dish-O-Matic II Stretcher Roll allows the operator to tension and level the blade in one setup
- + Drastically reduces the amount of hammering required
- + Reduces the need to flip the saw

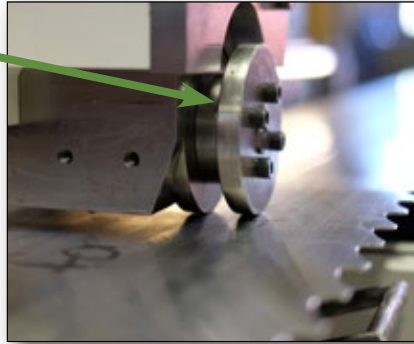


Extendable saw turn around

- + UHMW turn around tracks can extend and contract for varying saw lengths

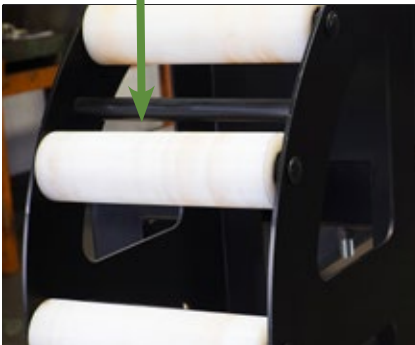


Hardened alignment bolts

- + Both top and bottom of saw for stability as the saw tracks through the rolls

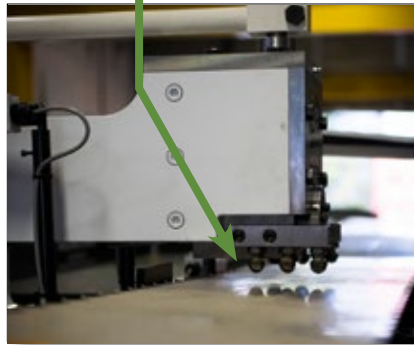

Available Nichrome leveling slabs

- + NiChrome slabs are extremely durable and wear resistant and offer a longer life span than traditional steel slabs.

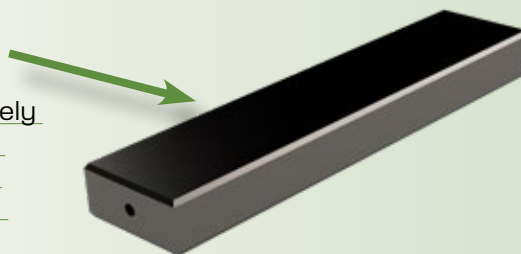

Options

UHMW air inspection lift

- + Lifts the saw while in place on the bench to efficiently inspect band saw blade tension

Hydraulic roll pressure


- + Large anvil upgrade

Variable speed rolls

- + Additional floor tracks

Band saw welding clamp

- + Hardened and ground hammering anvil
- + Optional heating element
- + Spring retraction
- + 10", 12", 16" capacity
- + Pneumatic clamping

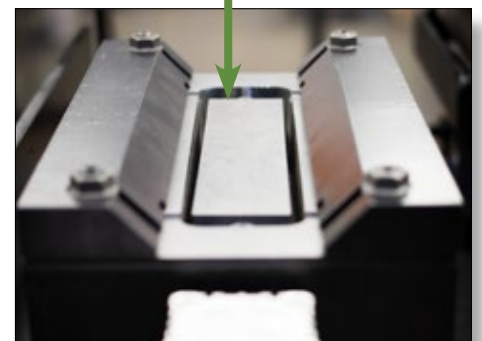

Specifications

| | | |
|----------------|------------------------------|--------------------------------------|
| Wheel diameter | (2) 36 inches | (2) 914mm |
| Leveling slabs | (2) 36" x 8" x 4" mild steel | (2) 914mm x 203mm x 102mm mild steel |
| Stretcher roll | Dish-O-Matic 10D | Dish-O-Matic 10D |
| Saw length | 21' x 5" | 6400mm x 127mm |
| Saws | Single cut | Single cut |
| Electricity | 480Vac, 3ph, 60hz | 480Vac, 3ph, 60hz |



Sales@williamsandwhite.com
www.williamsandwhiteequipment.com


CALL US NOW
+1 604-293-2268
TOLL FREE: 1-888-293-2268



Trac Tru Band Saw Bench

NO NEED TO FLIP THE SAW WITH THE DOM II TRAC TRU BENCH

The Williams & White Trac Tru band saw bench is a one-stop repair center for band saws. The rugged box beam, universal columns and our patented Dish-O-Matic system make the Trac Tru the best and most functional in the industry.

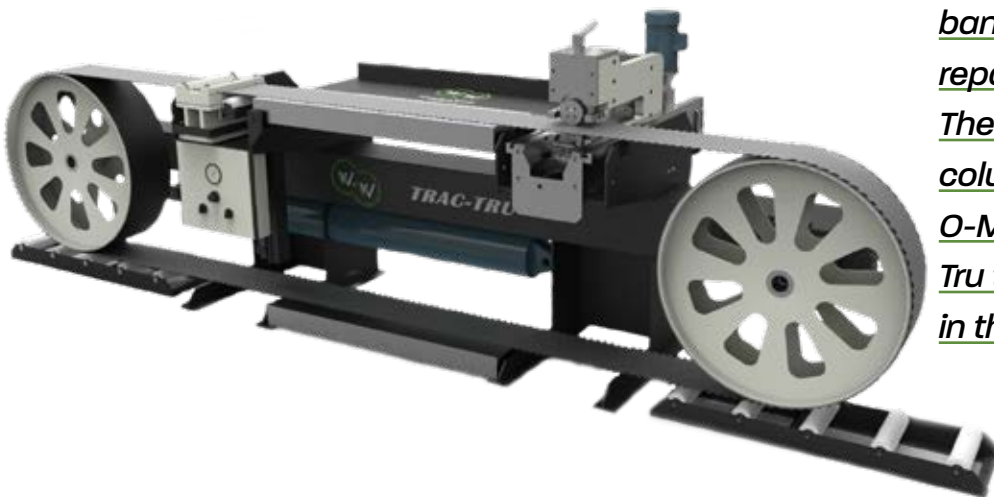

Highlights


- ✓ **Box-frame construction** → makes this the most durable stable bench in the industry
- ✓ **Air-strain cylinders** → tightens the saw and eliminates the need for weights
- ✓ **2 NiChrome anvils** → for top and bottom hammering
- ✓ **Intergrated lighting** → for precision inspection
- ✓ **Can handle saws from 28' - 60'** → versatile for your shop



Key Features

Welding clamp

- + The deluxe bench model is equipped with a welding clamp and welding slide. The welding slide enables you to easily move the clamp when it is not in use.

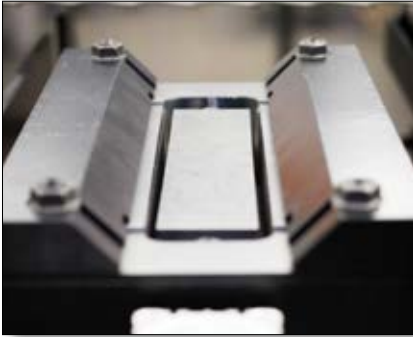

Expansion cylinder & multi-length

- + Uses an air-strain expansion cylinder to pull the saw blade, eliminating the need for weights.
- + Multi-length option available, which is intended for benches that work on multiple band saws of different lengths. This addition enables you to expand or compress the bench from one to twelve feet.
- + The ability to run multiple saws off of one bench reduces the amount of space required in your filing room or saw shop.



Williams and White Dish-O-Matic II System

- + Patented Williams & White Dish-O-Matic II Stretcher Roll allows the operator to tension and level the blade in one setup.
- + Drastically reduces the amount of hammering required.



Inspection lift

- + Standard on all deluxe models, the inspection lift allows the operator to raise the saw for further inspection.



Standard Nichrome leveling slabs

NiChrome slabs are extremely durable and wear resistant offering longer life span than traditional steel slabs.



Options

- + Height control
- + Electronically controlled wheel alignment
- + Electronically controlled roll positions
- + Integrated inspection lighting
- + Option to have a welding clamp heater, which heats the welding clamp and creates higher-quality welds.

Trac Tru #10

- + Up to 10" wide saw

Trac Tru #17

- + Up to 17" wide saw

Specifications

| | | |
|---------------------------|---------------------------------|---------------------------------------|
| Bandsaw length capacity | Up to 60' | Up to 18.3m |
| Bandsaw width capacity | Up to 17" | Up to 430mm |
| Standard roll radius | 6" | 150mm |
| Shipping weight (38' saw) | Approx 4500lb | Approx 2050kg |
| Electricity | 480Vac,3ph, 60hz | 480Vac,3ph, 60hz |
| Dimensions (36 wheel) | W:52" X H:58" X variable length | W:1320mm X H:1470mm X variable length |

